




High Precision Tools for Aerospace Industry



High Precision
Super Finishing
NexGen Coatings
Customised Solution

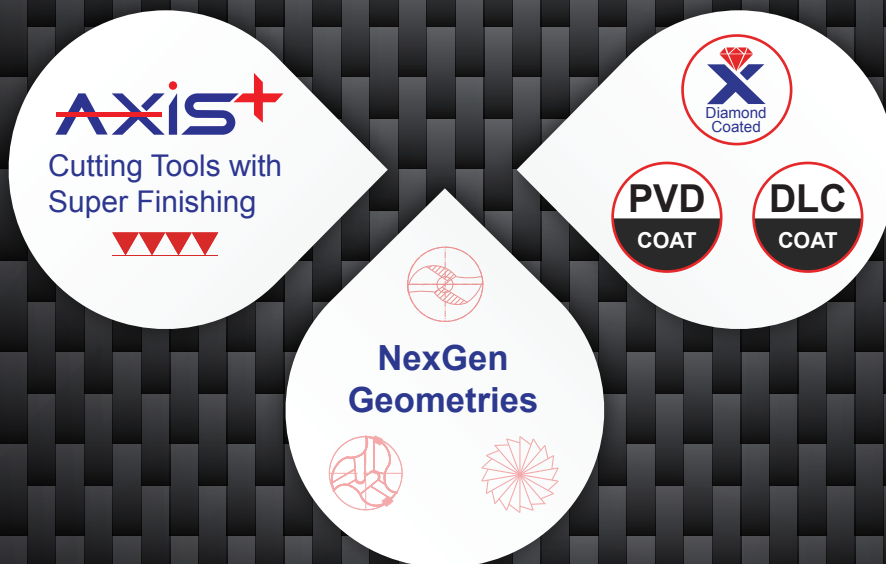

www.axis-microtools.com



QUALITY • PRECISION • CONSISTENCY

Features:

Special flute geometry
Close size control
High helix
Polished flute




Benefits:

Excellent finish
Efficient chip evacuation

Aluminium Machining

T6401 SOLID CARBIDE ALU DRILL

Dia Range 0.50 mm - 20.00 mm




E8381 2F ENDMILL

Dia Range 0.20 mm - 12.00 mm



E1381 3F ENDMILL WITH UNDERCUT

Dia Range 0.20 mm - 12.00 mm



E1481 3F ENDMILL INVERSE SHANK

Dia Range 0.20 mm - 12.00 mm



E2381 3F ENDMILL

Dia Range 2.00 mm - 12.00 mm




B8381 2F BALL NOSE ENDMILL

Dia Range 0.20 mm - 12.00 mm



B1381 2F BALL NOSE ENDMILL WITH UNDERCUT

Dia Range 0.20 mm - 6.00 mm




• **Composite**
CFRP / CFK / GFK

• **Aluminium**

Drilling CFRP / Composites / CFK / GFK

AXIS T6601

INDRILL CFRP



AXIS T6611 INDRILL CFRP WITH DOUBLE POINT ANGLE



AXIS T4601 INDRILL CFRP WITH SPECIAL POINT ANGLE



AXIS T0301 CALIBRATION DRILL WITH RADIAL CONE



AXIS T0311 CALIBRATION DRILL



Features:

- Specially designed geometries
- Engineered Hard CVD Diamond coatings
- Sharp cutting edges with optimised grinding techniques
- Micro grain High Performance Tungsten carbides



Benefits:

- Reduces forces, Cut clean without fibres, no delamination of layers
- Vibration free operation, excellent edge retention of holes and milled surfaces, less job damages
- Enhanced tool life

Milling CFRP / Composites / CFK / GFK


AXIS P1011

Dia Range 2.00 mm - 12.70 mm Composite




AXIS P0111

Dia Range 2.00 mm - 12.70 mm



AXIS P0711 / P0701 / P0721

Dia Range 2.00 mm - 12.70 mm



AXIS P0811 / P0801 / P0821

Dia Range 2.00 mm - 12.70 mm




AXIS P0911 / P0901 / P0921

Dia Range 2.00 mm - 12.70 mm




AXIS P5431 CFRP RIGHT HELICAL ROUTER

Dia Range 3.00 mm - 20.00 mm



AXIS P6411 CFRP ROUTER

Dia Range 3.00 mm - 20.00 mm

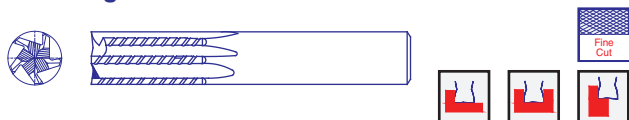


CFRP DIAMOND CUT ROUTER - BURR END

P1011




CFRP DIAMOND CUT ROUTER - FLAT END


P0111



CFRP DIAMOND CUT ROUTER - BALL END




CFRP DIAMOND CUT ROUTER RHRC - SAFE END



Also available
LHRC


CFRP DIAMOND CUT ROUTER - DRILL END



Also available
LHRC


AXIS P5421 CFRP LEFT HELICAL ROUTER



Dia Range 3.00 mm - 20.00 mm



AXIS P6551 DIAMOND CUT ROUTER

Dia Range 3.00 mm - 20.00 mm



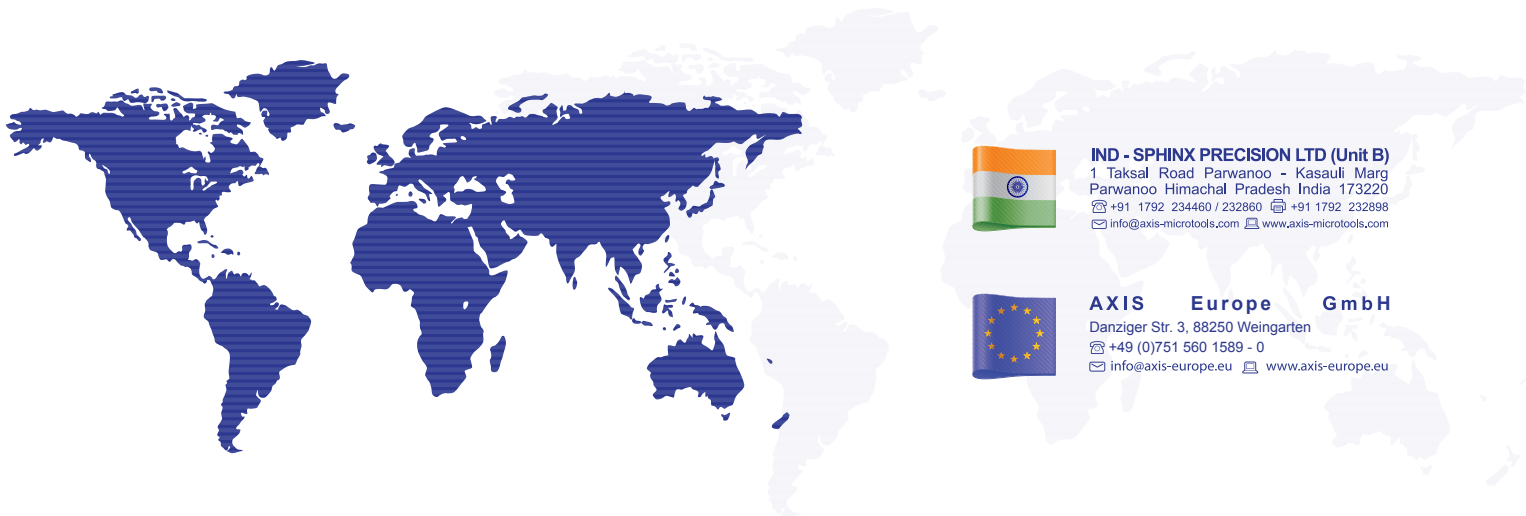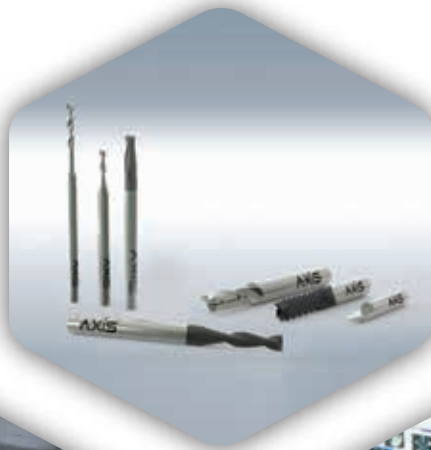

IND - SPHINX PRECISION LTD (Unit B)
 1 Taksal Road Parwanoo - Kasauli Marg
 Parwanoo Himachal Pradesh India 173220
 ☎ +91 1792 234460 / 232860 ☎ +91 1792 232898
 ✉ info@axis-microtools.com 🌐 www.axis-microtools.com



AXIS Europe GmbH
 Danziger Str. 3, 88250 Weingarten
 ☎ +49 (0)751 560 1589 - 0
 ✉ info@axis-europe.eu 🌐 www.axis-europe.eu

AXIS[®]
 Tools for **m**ICRO **m**ACHINING

